


PART NUMBER: OUT-RDB-16-A

RADIAL DISTRIBUTION BOX

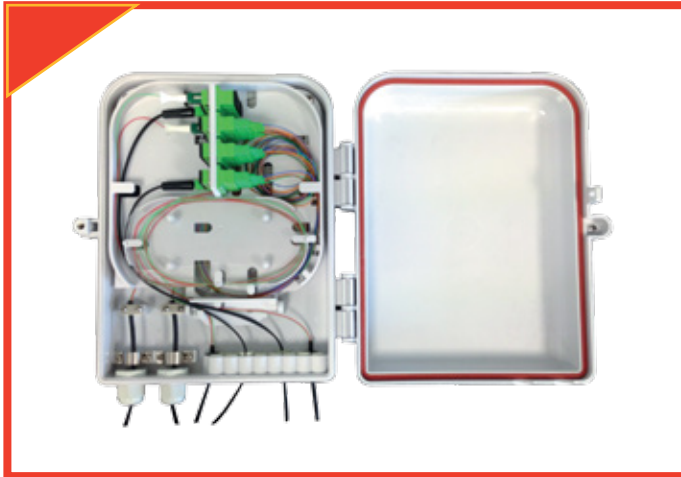

The Radial Distribution Box is rugged, low cost, low profile interconnection between central office and multi-dwelling units of FTTx application.

The design of UDM splitter terminal combines the functionality of a local convergence cabinet with UDM terminal. Its multi-layer design allows installers to access only the components necessary for initial installation or subscriber turn-up. It can house the splitter and allows for pigtail splicing of distribution/drop cables as needed.

FEATURES

- Indoor or outdoor rated
- Available 1x4, 1x8, 1x16 splitter as well as 2x4, 2x8, 2x16 splitter
- Suitable for wall-mounting or pole mounting application
- Max. up to 16 pcs of FTTH drop cable or pigtails
- Suitable for wall-mounting or pole mounting application
- 2 inlet ports and 16 outlet ports
- Anti-UV, ultra violet and rainfall resistant
- IP65

TECHNICAL SPECIFICATION

Item	Technical Parameters
Dimensions	268x320x90mm
Weight	1kg
Coating Diameter	Max. 2 ports (Max. dia. : 12mm)
Cable input port	Max. 16 ports (Max. dia. : 3mm)
Cable output capacity	16core
Max. capacity	-40 ~ +85°C
Operation Temperature	≥ 450kg/cm, @10mm/min
Material	PC/ABS
Tensile Strength	35/ (normal temp.), 10/ (-30°C)
Impact Strength	≥ 450/, @10/min
Flexural Strength	-40~+85°C