



CODE: WO-1F-SH-OF

**PRODUCT DATA**


MATERIAL	ABS
HEIGHT (B)	115 mm
LENGTH (A)	86 mm
DEPTH (C)	23 mm
COLOR	RAL 9016
FLAMABILITY GRADE	UL94 V0

PRODUCT DESCRIPTION

This user optic socket was developed according to the Open Fiber technical specification, to allow the connection of the individual home apartments to the FTTH fiber optic network. Small and aesthetically pleasing, the termination inside the box can be achieved by 900 μ m pigtail with SC / APC connector that can be joint to the optical cable, or with a fast SC/APC mechanical connector and a one-way FBG optical reflector.

PRODUCT FEATURES:

- 4 inputs for a \varnothing 2.6mm ST 1730 OF single fiber cable
- 2 supports for smouv
- Fiber richness dispersion space \varnothing 0,9mm
- FBG optical reflector suitable
- Fast Mechanical SC/APC connector suitable
- Installation options with supplied kit:
 - Can be mounted on top of a UNI 503 distribution box
 - Can be mounted on wall surface
- controlled bending ratio ITU-T G.657 A1
- Material ABS UL94-V0

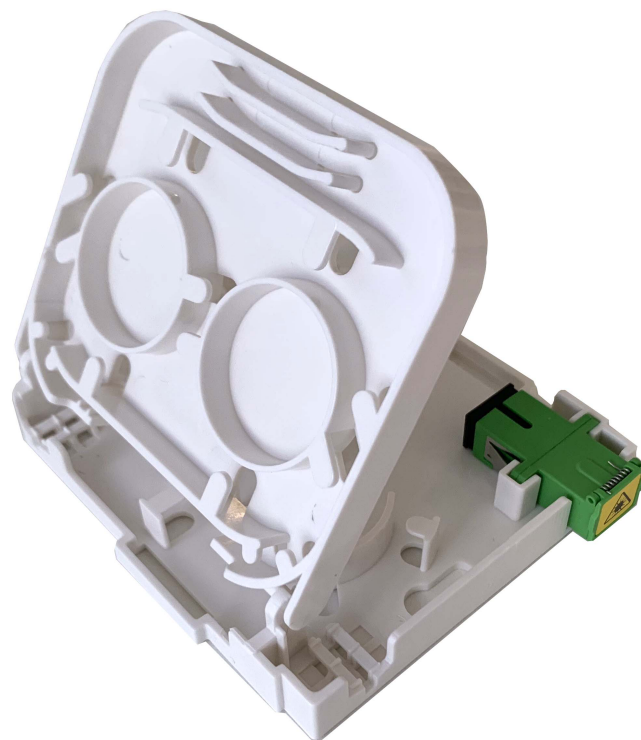


FTTH WALL OUTLET OPEN FIBER WALL OUTLET

DS-OUT-WO-1F-SH-OF 28/9/2020



DRAWINGS

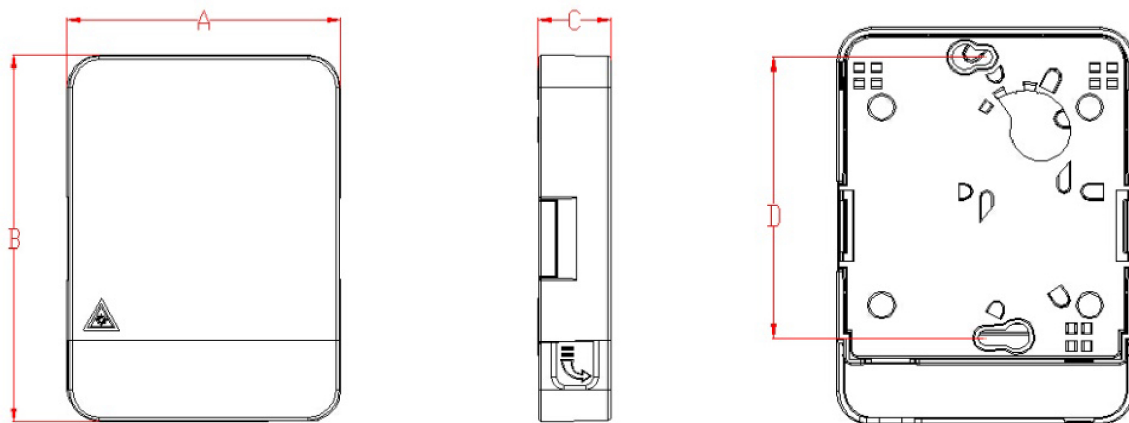

TECH SPECS:

- NT 1706 OF
- ST 1729 OF