


Multi-user PDU that can be installed in rack cabinets with 19" (and 21" uprights with an optional adaptation bracket), it is suitable for redundant power supply of active devices at 48V DC. The multi-user PDU has 2 lines with $I_n=63A$, 5+5 fuse holder bases with $I_N=32A$ with optical signaling of blown fuse, for power supply and protection of the devices.

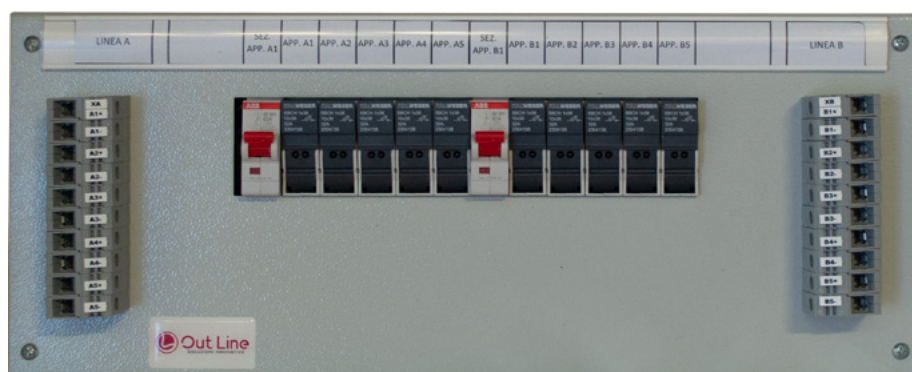

PRODUCT CODE

PDU48-5+5-2L-63A

TECHNICAL FEATURES

DIMENSIONS	175X185X435 mm (HxPxL)
IP PROTECTION DEGREE	IP 20
CURRENT RATING	63A
POWER SUPPLY	Two separate disconnectable lines
CASE MATERIAL	Galvanized painted steel
COLOR	RAL 7035
OPERATING TEMPERATURE RANGE	0...+40 °C
VOLTAGE RATING	48V in Direct Current