


Outdoor aerial installation – 75m span length, NESC Medium, 1% installation sag

- Loose tubes with 12 optical fibers, filled with thixotropic compound
- Stranded loose tubes with dummies if necessary
- Central strength member made of FRP with PE coating if necessary
- Cable strand: dry, with water blocking yarns and tape
- Outer sheath: Black HDPE, UV resistant, 2 ripcords under sheath

24..48 fibers

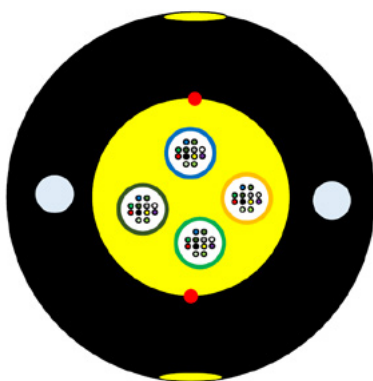

## PRODUCT CODE

DS-OUT-CABLES-ADSS-DROP-24-48 / -

## TECHNICAL FEATURES

Number of fibers	24	36	48
Module Ø	1.35mm		
Outer sheath thickness	Nom 2.0mm (FRP portion)		
Outer diameter	7.7±0.5mm	7.9±0.5mm	8.3±0.5mm
Weight (±10%)	43kg/km	46kg/km	50kg/km