




The subrack junction and termination has a 90° pivot opening on three fixing points, 1 19" Rack Unit height, the distance from the fixing of the front uprights to the rear ones is 220mm, it is equipped with 48 SC/APC simplex type adapters, 48 pre-installed coloured half-braces and 4 junction cards with 12 positions each. This product was designed and developed on the basis of the Open Fiber/Infratel technical specification.

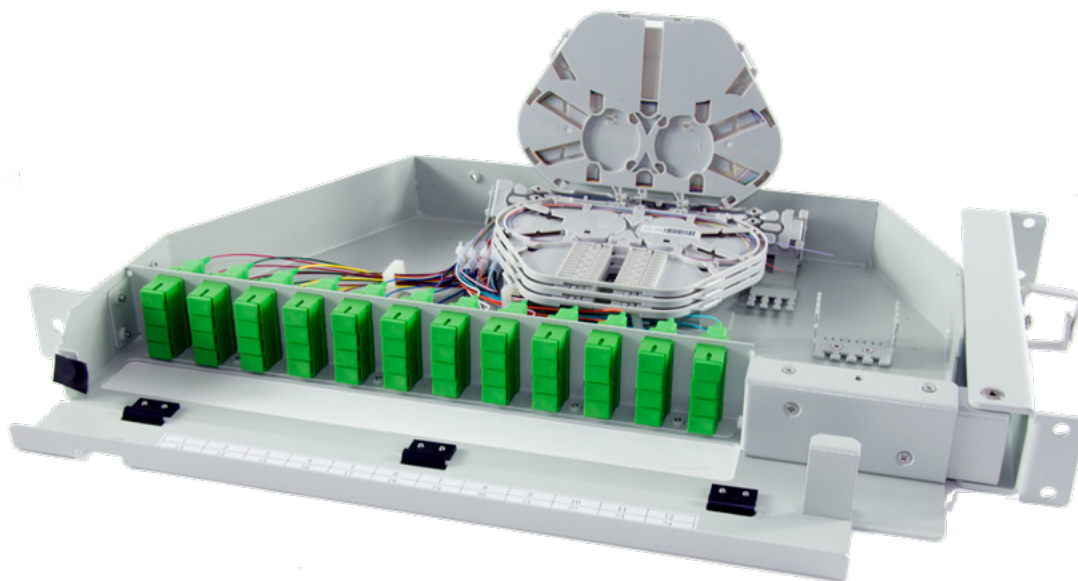

## PRODUCT CODE

**SUB3P-A-48SCA-SX-48PTA1-J-T-CD/** Pivot opening subrack, 3 fixing points, for splice and patch, precabled with 48 adapter and 48 pigtails SC/APC – INFRATEL color code for fibers.

**SUB3P-A-48SCA-SX-48PTA1-J-T-AB /** Pivot opening subrack, 3 fixing points, for splice and patch, precabled with 48 adapter and 48 pigtails SC/APC – OPEN FIBER color code for fibers.

## TECHNICAL FEATURES

MATERIAL	Steel
OPENING TYPE	Pivot on 3 fixing points
HEIGHT	44 MM
WIDTH	430 MM
DEPTH	260 MM
CABLE ENTRANCES	2 (24 FO)
CAPACITY	48
SPLICE TRAY	4 (12 FO)
SMOUV DIMENSIONS	standard
ADAPTER	SC Simplex
COLOR	Grey RAL 7035

