


# USER OPTICAL SOCKET (OTO)

## OPTILINK - REEL WALL OUTLET



Fiber wall outlet with a 10/20/30/40 meters SC/LC-APC patch cord connected to an adapter. The patch cord is coiled up inside the outlet on a rotating spool that allows it to be stored inside the outlet as well as unwound to the outside. Optilink can be used to bring a fiber optic Internet connection to any room in the house, thanks to its cable that can be extended up to 40 meters.

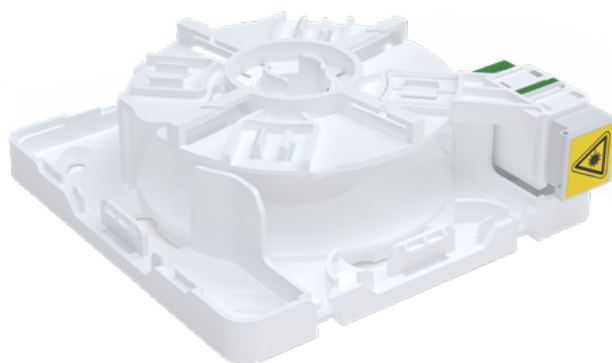

### PRODUCT CODE

CODE BASED ON OPTIONS - ASK US A QUOTATION BASED ON YOUR NEEDS

### TECHNICAL FEATURES

MATERIAL	ABS
HEIGHT	80 mm
WIDTH	80 mm
DEPTH	28,5 mm
COLOR	RAL 9016
FLAMABILITY GRADE	UL94 V0