


USER OPTICAL SOCKET (OTO)

PLESIO – DIN



This user optic socket has been developed to allow the connection of the individual home apartments to the FTTH fiber optic network. Small and aesthetically pleasing, the termination inside the box can accommodate up to 2pcs 900 μm pigtail with SC/APC (or LC/APC) connector that can be spliced to the optical cable, or with fast SC/APC (or LC/APC) mechanical connector.

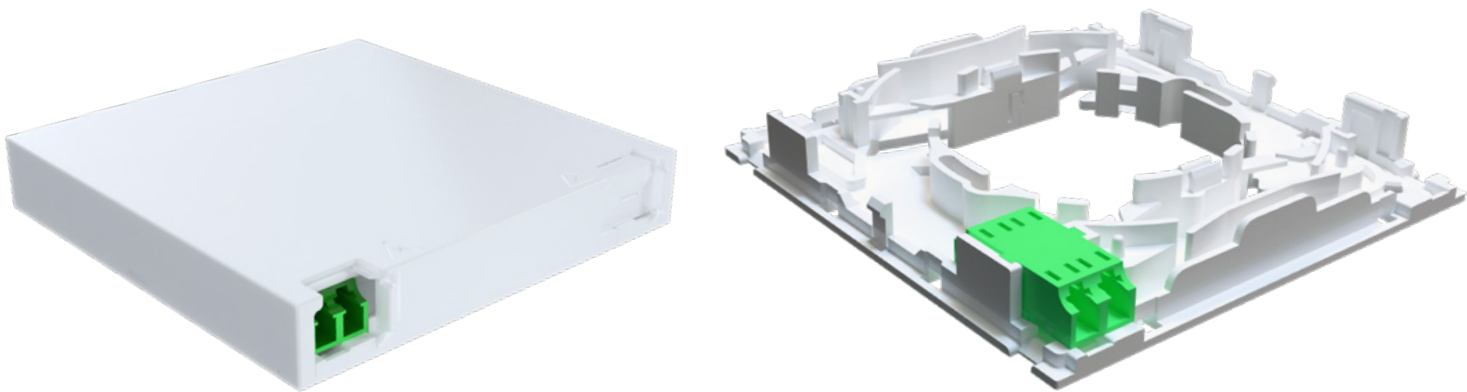

PRODUCT CODE

CODE BASED ON OPTIONS - ASK US A QUOTATION BASED ON YOUR NEEDS

TECHNICAL FEATURES

MATERIAL	ABS
HEIGHT	101 mm
WIDTH	101 mm
DEPTH	16,5 mm
COLOR	White
OPTICAL CONNECTION	SC/APC - LC/APC
ADAPTER	SC/APC - LC/APC
FLAMABILITY GRADE	UL94 V0