


RFIDs are identifiers tags which can be applied to primary and secondary optical distribution network elements, both during the first installation phase and during maintenance on existing elements.

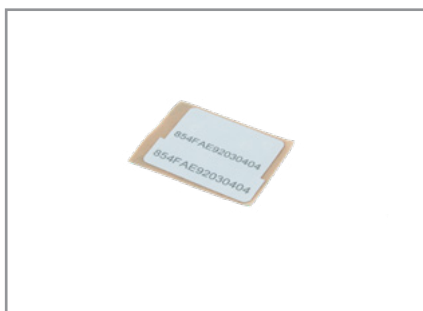

PRODUCT CODE

RFID-TAG-ABS/ RFID Tag for metallic components (rigid ABS support)

RFID-TAG-BOR/ RFID Tag for Open Fiber OTO (White PVC)

RFID-TAG-PL-PVC/ RFID Tag for plastic components

RFID-TAG-TR-FI-TH-SL / RFID Tag for mini-cables (with heath shrink)

RFID-TAG-TR-FI/ RFID Tag for mini-cable (with protective transparent label)

RFID-TAG-TR-FI-2 / RFID Tag for mini-cable (with protective transparent label) and rigid ABS support

TECHNICAL FEATURES

MEMORY CAPACITY	1kb overwritable and lockable
TRANSMISSION FREQUENCY	13,5 MHz
RFID TYPE	Passive Tag A 14443
READING AND WRITING STANDARDS	NFC
DIMENSIONS	15x30x0,4 (PVC)