CODE: FEP-EMPTY



PRODUCT DETAILS	
EXTERNAL CASE MATERIAL	ABS
REAR ADAPTER PLATE	SPONGE
HEIGHT	191mm
LENGHT	110mm
DEPTH	38mm
COLOR	RAL7035, other available
PROTECTION LEVEL	IP54, IK08

DESCRIPTION:

The Fiber Entry Point (FEP) represents the termination point of access network at apartment/villa for each customer and it's a mutualization point for HH connection being equipped with SC connectors.
On bottom part there are two cables entrances for 2 cables up to 14mm and 1 circular outputs (inside the wall using a tube) for 1 cable up to 10mm diameter; the internal part is suitable for 2 splices, 2 connections between SC connectors and extra length managers.







Out Line S.r.l. - Via degli Olmetti, 39D 00060 Formello (RM) - Italia
Tel: +39 06 90405137 Fax: +39 06 90110315 www.outline.company / P.I. 066618831009

TECHNICAL FEATURES:



- IP54 when sealing is applied, IK8 case with sliding opening lid with safety lock and unlosable locking system, UL94V0, UV resistant;
- Wall installation kit included;
- Rear sponge for wall adaptation and eventually as silicon retainer for sealing;
- 2 circular entries up to 14mm diameter on bottom side;
- 1 circular entry for drop cables up to 10mm diameter on rubber internal rotatable ball;
- lid is totally removable for splicing;
- 2 holders for standard heatshrinkable tubes;
- Elements for guiding and managing the incoming and outgoing fibers with controlled bending radius of no less than 15mm
- Reflectors can be managed in this box
- NFC standard RFID ISO-IEC 14443A on request.
- Different configurations available on request, with adapters only or adapters and pigtails.

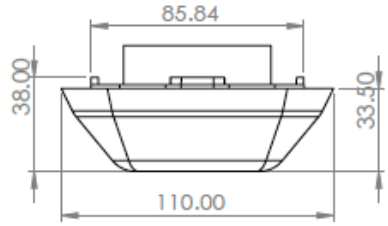

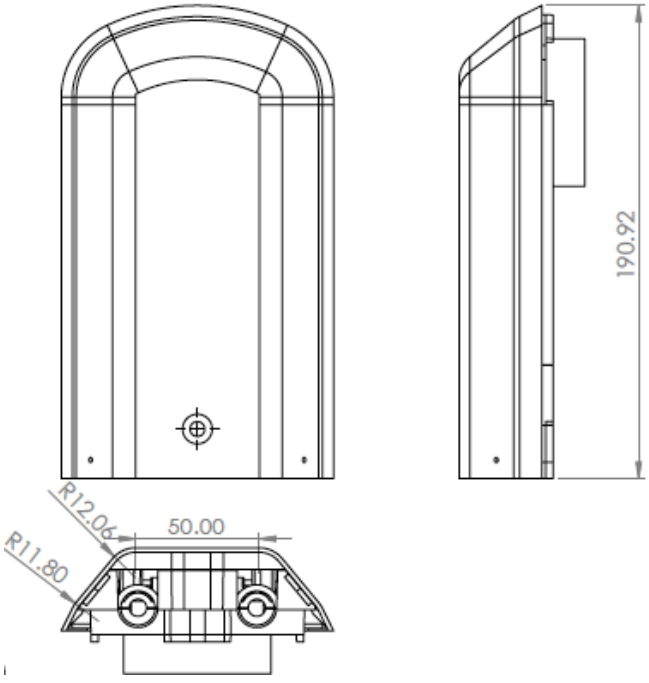

Out Line S.r.l. - Via degli Olmetti, 39D 00060 Formello (RM) - Italia
Tel: +39 06 90405137 Fax: +39 06 90110315 www.outline.company / P.I. 066618831009