
OPTICAL DISTRIBUTION BOX
PTE 12 U.I

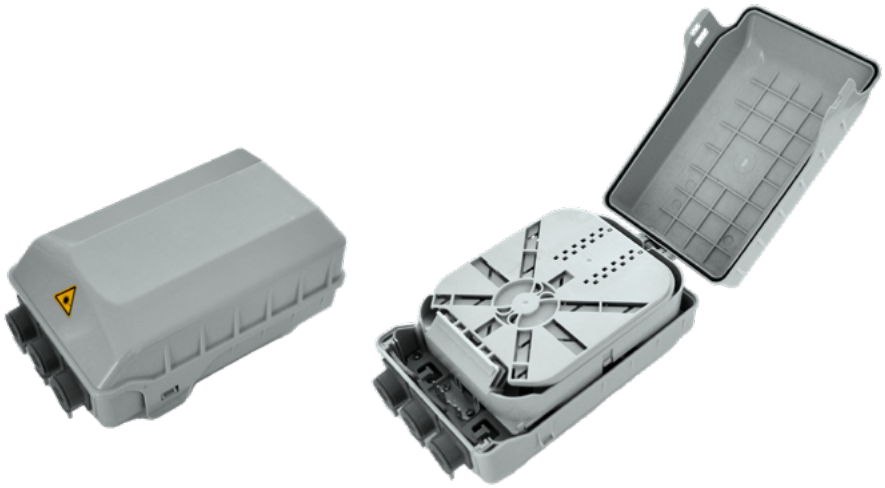

The 12 U.I. Unified PTE is designed to manage and terminate the building's vertical cabling in an FTTH architecture, as well as an operator's horizontal network, supporting the connection of up to 12 optical fibres with SC/APC connectors.

PRODUCT CODE
PTE-12-UNI-IE-OL

TECHNICAL FEATURES	
CASE DIMENSIONS (W × D × H)	202 × 177 × 112 mm
MINIMUM FIBRE BEND RADIUS	20 mm
NUMBER OF SPLICING MODULES	2 modules, 12 optical fibres each
TERMINATION RACK CAPACITY	8 + 4 flangeless SC/APC adapters (12 terminations)
CABLE ENTRY DIAMETER	Corrugated or spiral conduit, Øext. 20 mm
CABLE ENTRANCES	6
PROTECTION CLASSIFICATION	IP56 - IK10
MATERIAL	ABS
COLOR	Grey RAL 7035